


# VT-120-F

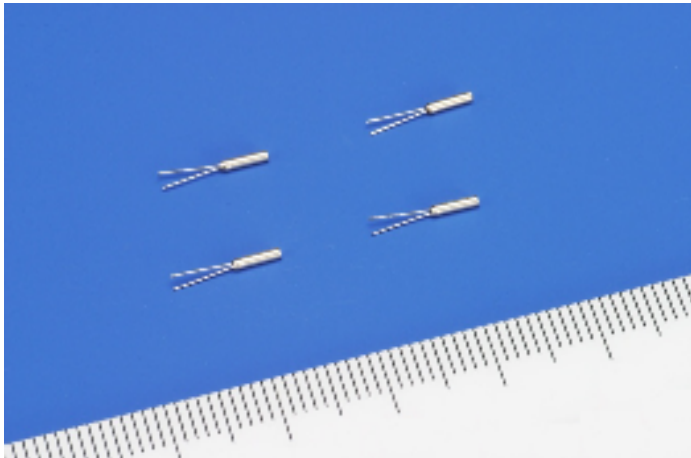

## Features

- Compact 1.2Φ tubular package.
- Photolithographic process
- Excellent low drive level characteristics.
- Complete Pb-free
- Complies with EU RoHS directive

## Applications


Small/Thin Watches.  
Sub-clock function for a variety of Micro-computer etc.

## Standard Specifications

(Temperature: 25±2°C, DL;0.1μW)

Item	Symbol	Specifications	Conditions Note
Nominal Frequency	f_nom	32.768kHz	
Frequency Tolerance	f_tol	±20×10 <sup>-6</sup>	Please specify
Turnover Temperature	Ti	+25±5°C	
Parabolic Coefficient	B	(-0.035±10%)×10 <sup>-6</sup> /°C <sup>2</sup>	
Load Capacitance	CL	6pF~12.5pF	
Motional Resistance (ESR)	R1	50kΩ max.	
Absolute Max. Drive Level	Dlmax.	1.0μW max.	
Drive Level	DL	0.1μW typ.	
Shunt Capacitance	C0	0.8pF typ.	
Frequency Ageing	f_age	±3×10 <sup>-6</sup>	+25±3°C, First Year
Operating Temperature	T_use	-20~+60°C	
Storage Temperature	T_stg	-30~+70°C	Piece part basis

## Dimensions

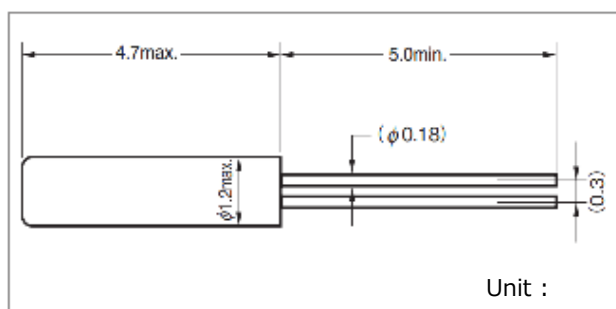

## Seiko Instruments Inc.

Quartz Crystal Sales Department  
1-8, Nakase, Mihamaku, Chiba-shi, Chiba 261-8507, Japan  
Tel : +81-43-211-1207 Fax : +81-43-211-8030  
[http : //www.sii.co.jp/en/quartz/](http://www.sii.co.jp/en/quartz/)