

SC-32L


3215-Size 32 kHz Ultra-Low ESR Tuning Fork
Crystal Resonator R1 = 40 kΩ Max.

•Features

- Achieves ultra-low ESR R1=50kΩ Max. over a wide temperature range (-40°C to +85°C).
- Highly reliable ceramic package
- Excellent shock and heat resistance.
- Complies with EU RoHS directive (completely Pb-free)
- Built-in highly reliable photolithographic crystal Resonator

•Applications

- Smart meters
- Smartwatches
- Electronic shelf labels
- Microcontroller (MCU) sub-clocks, etc.
- Bluetooth modules
- PCs, tablets
- GPS, GNSS modules

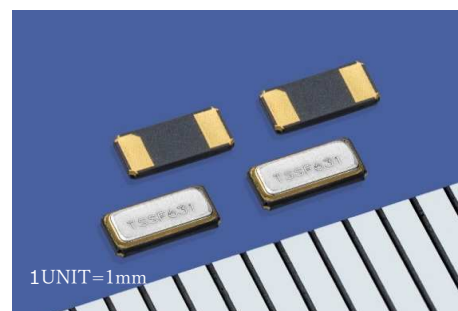


•Specifications


Conditions where not specified (Temperature: 25±2°C, DL;0.1μW)

Item	Symbol	Specifications	Conditions / Note
Nominal Frequency	f_nom	32.768kHz	
Frequency Tolerance	f_tol	±20×10 ⁻⁶	Other tolerance values are available upon request.
Turnover Temperature	Ti	25±5°C	
Parabolic Coefficient	β	(-0.033±10%) × 10 ⁻⁶ /°C ²	
Load Capacitance	CL	4pF, 6pF, 7pF, 9pF, 12.5pF	For other CLs, please contact us.
Motional Resistance (ESR)	R1	40kΩ Max.	-40°C to +85°C
Absolute Max. Drive Level	DLmax.	1.0μW Max.	
Drive Level	DL	0.1μW Typ.	
Shunt Capacitance	C0	1.2pF Typ.	Reference value
Frequency Ageing	f_age	±3×10 ⁻⁶ /year	First year
Operating Temperature	T_use	-40~+85°C	
Storage Temperature	T_stg	-55~+125°C	Store individually


•Dimensions

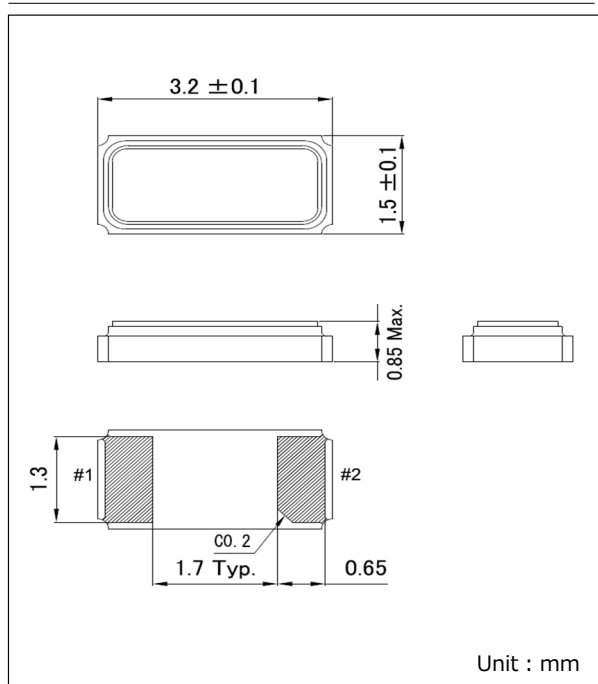

•Internal Lead Connections

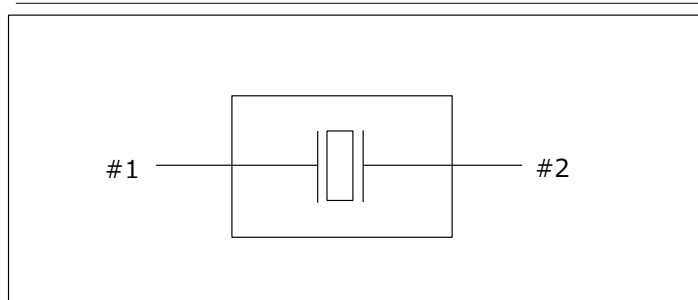

•Recommended Soldering Pattern

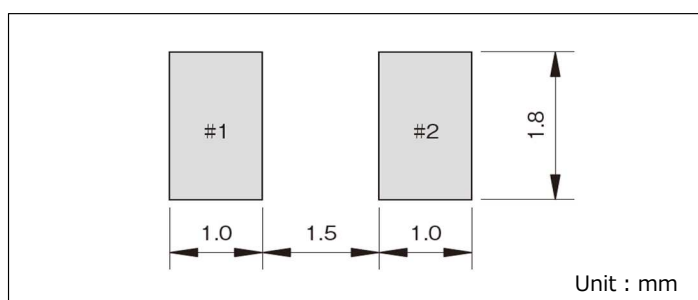

Remark: When designing the circuit board, do not place circuit patterns on the crystal resonator mounting area (bottom surface).

Seiko Instruments Inc.

Quartz Crystal Division Sales Head Office
1-8, Nakase, Mihamaku, Chiba-shi, Chiba 261-8507, Japan
Tel: +81-43-211-1207 Fax: +81-43-211-8030
[http : //www.sii.co.jp/en/quartz/](http://www.sii.co.jp/en/quartz/)