


SSP-T7-FL (SMD type low CL resonator for low-power microcontrollers) **NEW**

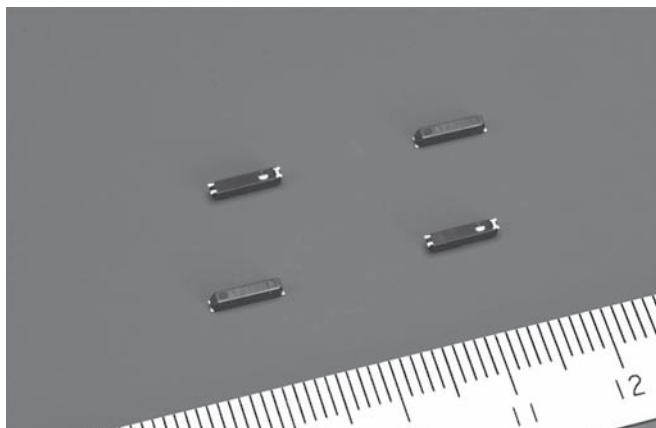

FEATURES

- Consumes one tenth the standby power of general crystal resonators (with a load capacitance of 12.5 pF).
- Excellent low drive level characteristics.
- RoHS directive compliant.

APPLICATIONS

- Consumer-electronics products for saving standby energy consumption.
- Battery operated devices requiring a long battery life.

STANDARD SPECIFICATIONS

Conditions without notice (Temperature: +25±2°C, DL: 0.1μW)

Item	Symbol	Specifications	Conditions / Notes
Nominal Frequency	f_nom	32.768kHz	
Frequency Tolerance	f_tol	±20 x 10 ⁻⁶ , ±50 x 10 ⁻⁶	
Turnover Temperature	Ti	+25±5°C	
Parabolic Coefficient	B	(-3.5±1.0) x 10 ⁻⁸ /°C ²	
Load Capacitance	C _L	3.7pF, 4.4pF, 6.0pF	
Motional Resistance (ESR)	R ₁	65kΩ max.	
Absolute Maximum Drive Level	DLmax.	1μW	
Level of Drive	DL	0.01μW	
Shunt Capacitance	C ₀	0.8pF typ.	
Frequency Ageing	f_age	±3 x 10 ⁻⁶	+25±3°C, First Year
Operating Temperature	T_use	-40°C to +85°C	
Storage Temperature	T_stg	-55°C to +125°C	Piece part basis

■ SSP-T7-FL (SMD type low CL resonator for low-power microcontrollers)

The SSP-T7-FL is a surface-mounted resonator specially developed and released for ultra-low-power microcontrollers.

Through collaboration with major microcontroller manufacturers, we achieved low power consumption resonator. Please visit the SII website (www.sii-crystal.com) for finding microcontrollers for SSP-T7-FL.

CAUTION

The SSP-T7-FL is designed for use in ultra-low-power microcontrollers. Do not use this resonator in regular microcontrollers as it might cause problems with oscillation.