

SSP-T7-F


7015-Size 32 kHz Molded Package Tuning Fork
Crystal Resonator

•Features

- Plastic Molded Type
- SMD Type Suitable for High-Density Mounting
- Excellent Shock Resistance and Heat Resistance
- Compliant with EU RoHS Directive / Halogen-Free
- Incorporates a Highly Reliable Photolithographically Processed Quartz Crystal Resonator

•Applications

- Smart Meters
- Sub Clock for MC
- Reference Clock for RTCs
- Security Cameras
- Electronic Shelf Labels (ESL)
- Home Appliances

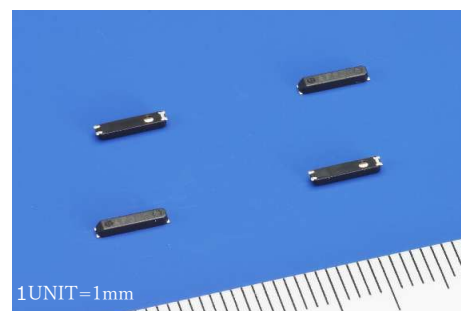


•Specifications


Conditions where not specified (Temperature: 25±2°C, DL;0.1μW)

Item	Symbol	Specifications	Conditions / Note
Nominal Frequency	f_nom	32.768kHz	
Frequency Tolerance	f_tol	±20×10 ⁻⁶	Other tolerance values are available upon request.
Turnover Temperature	Ti	25±5°C	
Parabolic Coefficient	β	(-0.033±10%) × 10 ⁻⁶ /°C ²	
Load Capacitance	CL	7pF, 9pF, 12.5pF	For other CLs, please contact us.
Motional Resistance (ESR)	R1	65kΩ Max.	
Absolute Max. Drive Level	DLmax.	1.0μW Max.	
Drive Level	DL	0.1μW Typ.	
Shunt Capacitance	C0	0.9pF Typ.	Reference value
Frequency Ageing	f_age	±3×10 ⁻⁶ /year	First year
Operating Temperature	T_use	-40~+85°C	
Storage Temperature	T_stg	-55~+125°C	Store individually


•Dimensions

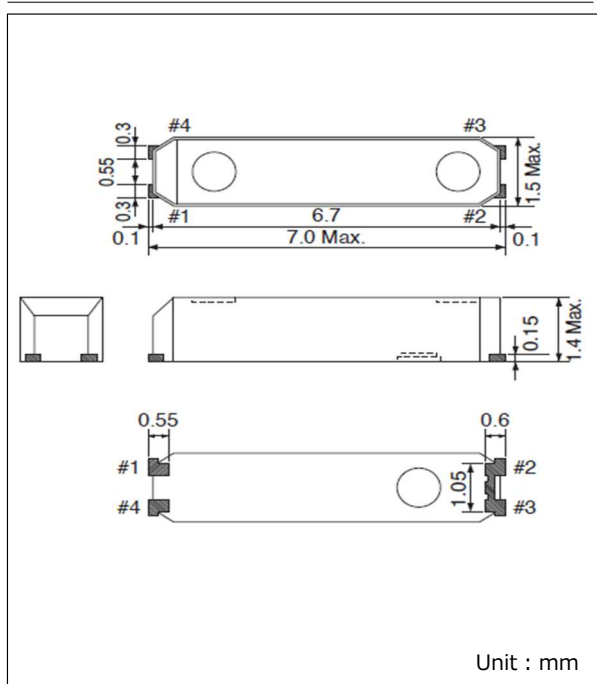

•Internal Lead Connections

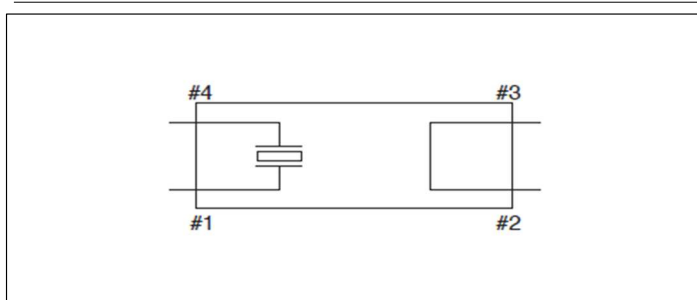

•Recommended Soldering Pattern

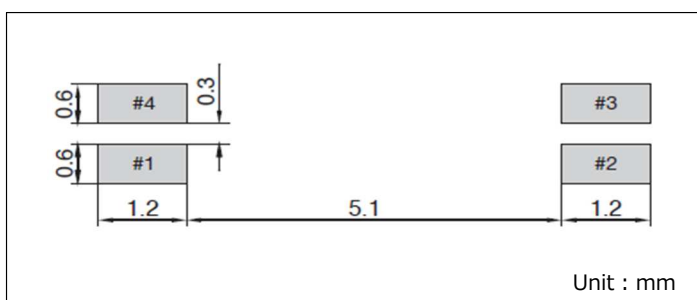

Remark: When designing the circuit board, do not place circuit patterns on the crystal resonator mounting area (bottom surface).

Seiko Instruments Inc.

Quartz Crystal Division Sales Head Office
1-8, Nakase, Mihamaku, Chiba-shi, Chiba 261-8507, Japan
Tel: +81-43-211-1207 Fax: +81-43-211-8030
[http : //www.sii.co.jp/en/quartz/](http://www.sii.co.jp/en/quartz/)