

VT-200-F


Ø2.0 mm Cylindrical 32 kHz Tuning Fork Crystal Resonator

•Features

- Ø2.0 mm Cylindrical Package
- Incorporates a Highly Reliable Photolithographically Processed Quartz Crystal Resonator
- Excellent Shock Resistance and Environmental Resistance
- Compliant with EU RoHS Directive
- Pb-Free

•Applications

- Clock for Quartz Watches
- Sub Clock for MCUs
- Reference Clock for RTCs
- Security Cameras
- Smart Meters
- Home Appliances and Remote Controls

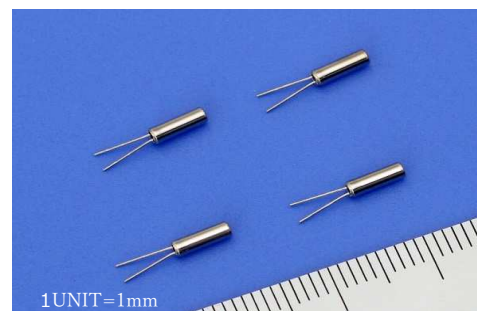


•Specifications

Conditions where not specified (Temperature: 25±2°C, DL;0.1μW)

Item	Symbol	Specifications	Conditions / Note
Nominal Frequency	f_nom	32.768kHz	
Frequency Tolerance	f_tol	±20×10 ⁻⁶	Other tolerance values are available upon request.
Turnover Temperature	Ti	25±5°C	
Parabolic Coefficient	β	(-0.035±10%) × 10 ⁻⁶ /°C ²	
Load Capacitance	CL	7pF, 9pF, 12.5pF	For other CLs, please contact us.
Motional Resistance (ESR)	R1	50kΩ Max.	
Absolute Max. Drive Level	DLmax.	1.0μW Max.	
Drive Level	DL	0.1μW Typ.	
Shunt Capacitance	C0	0.9pF Typ.	Reference value
Frequency Ageing	f_age	±3×10 ⁻⁶ /year	First year
Operating Temperature	T_use	-40~+85°C	
Storage Temperature	T_stg	-40~+85°C	Store individually

•Dimensions

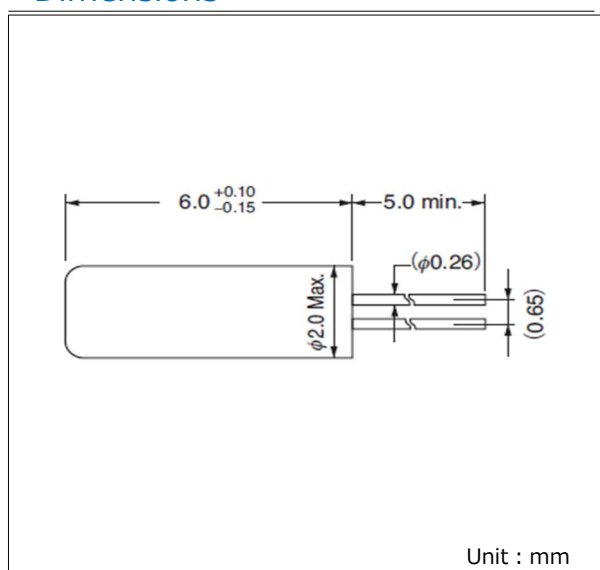

Remark: When designing the circuit board, do not place circuit patterns on the crystal resonator mounting area (bottom surface).

Seiko Instruments Inc.

Quartz Crystal Division Sales Head Office
 1-8, Nakase, Mihamaku, Chiba-shi, Chiba 261-8507, Japan
 Tel: +81-43-211-1207 Fax: +81-43-211-8030
[http : //www.sii.co.jp/en/quartz/](http://www.sii.co.jp/en/quartz/)